



TRANSMISSION


6.25:1 Ratio

APPLICATIONS

**Walk Behind (Self-Propelled) Lawn Mowers,
Line Marking Equipment, Floor Scrubbers, Lawn Vac's
and other equipment requiring a transmission.**

TRANSMISSION FEATURES

**Die Cast Housings, Permanently Lubricated
Cone Clutch for Smooth Engagement,
Various Input Couplings Possible**

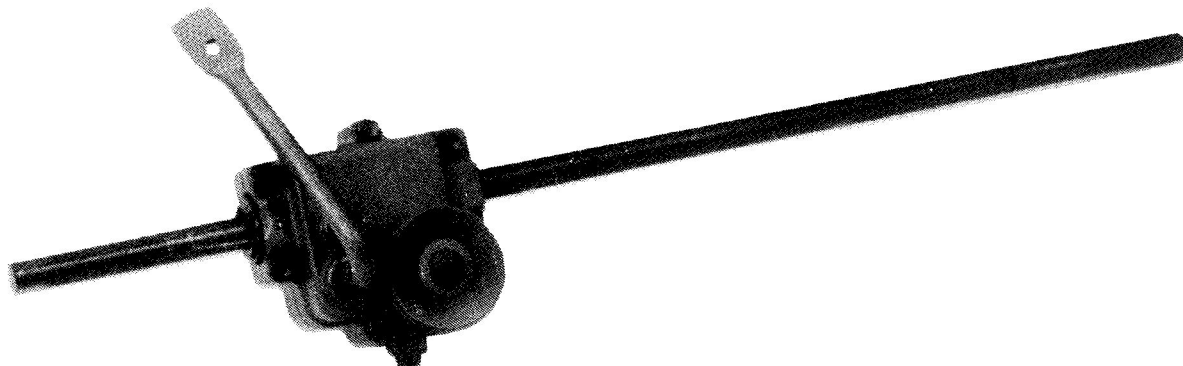


358 NW F Street Richmond, IN 47374-2297 (317) 966-8161 Fax: (317) 935-2346

DIMENSIONAL DRAWING



TRANSMISSION

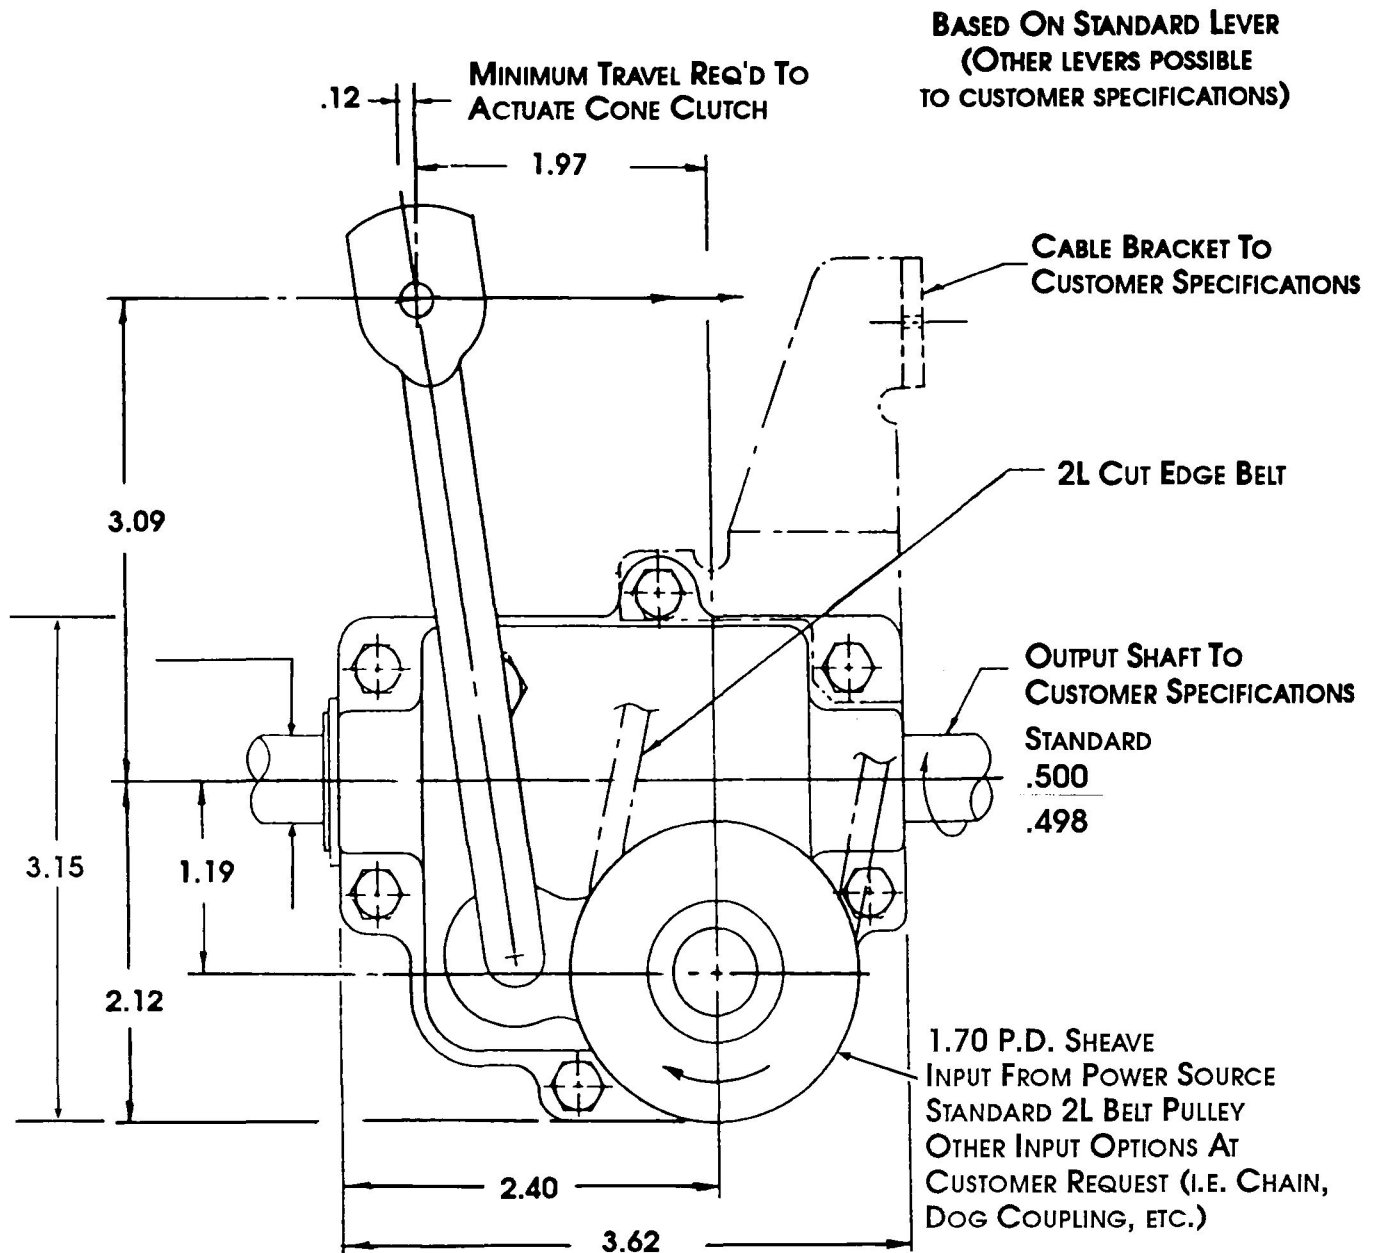

SPECIFICATIONS

GEAR RATIO: 6.25:1
INPUT SPEED (Max.): 3200 RPM
OUTPUT TORQUE (Max):
44 Inch Lbs.

NORMAL LEVER LOAD TO
ACTUATE CONE CLUTCH: 29 - 32 Lbs.
MAXIMUM LEVER LOAD ALLOWABLE:
40 Lbs.

